



FIG. 1 is a perspective view of a device in accordance with the present invention. The device includes a base 10 and a cover 20. The base 10 has a front edge 30 and a rear edge 40. The cover 20 has a front edge 50 and a rear edge 60. The device is shown in a closed position.

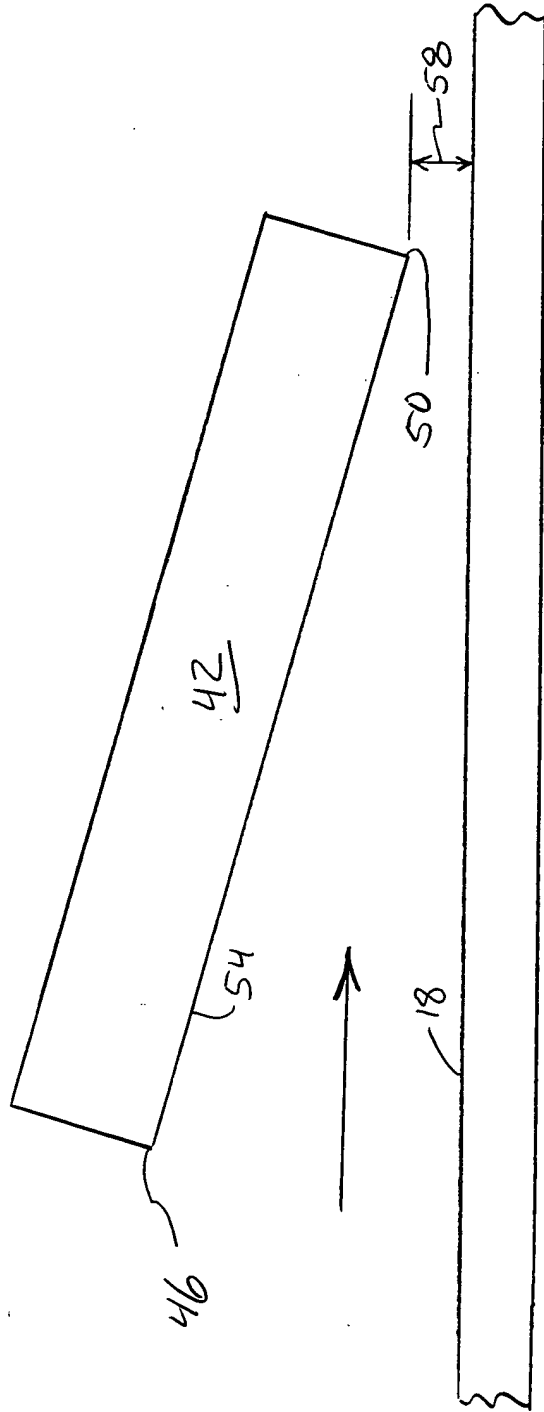


FIG. 2

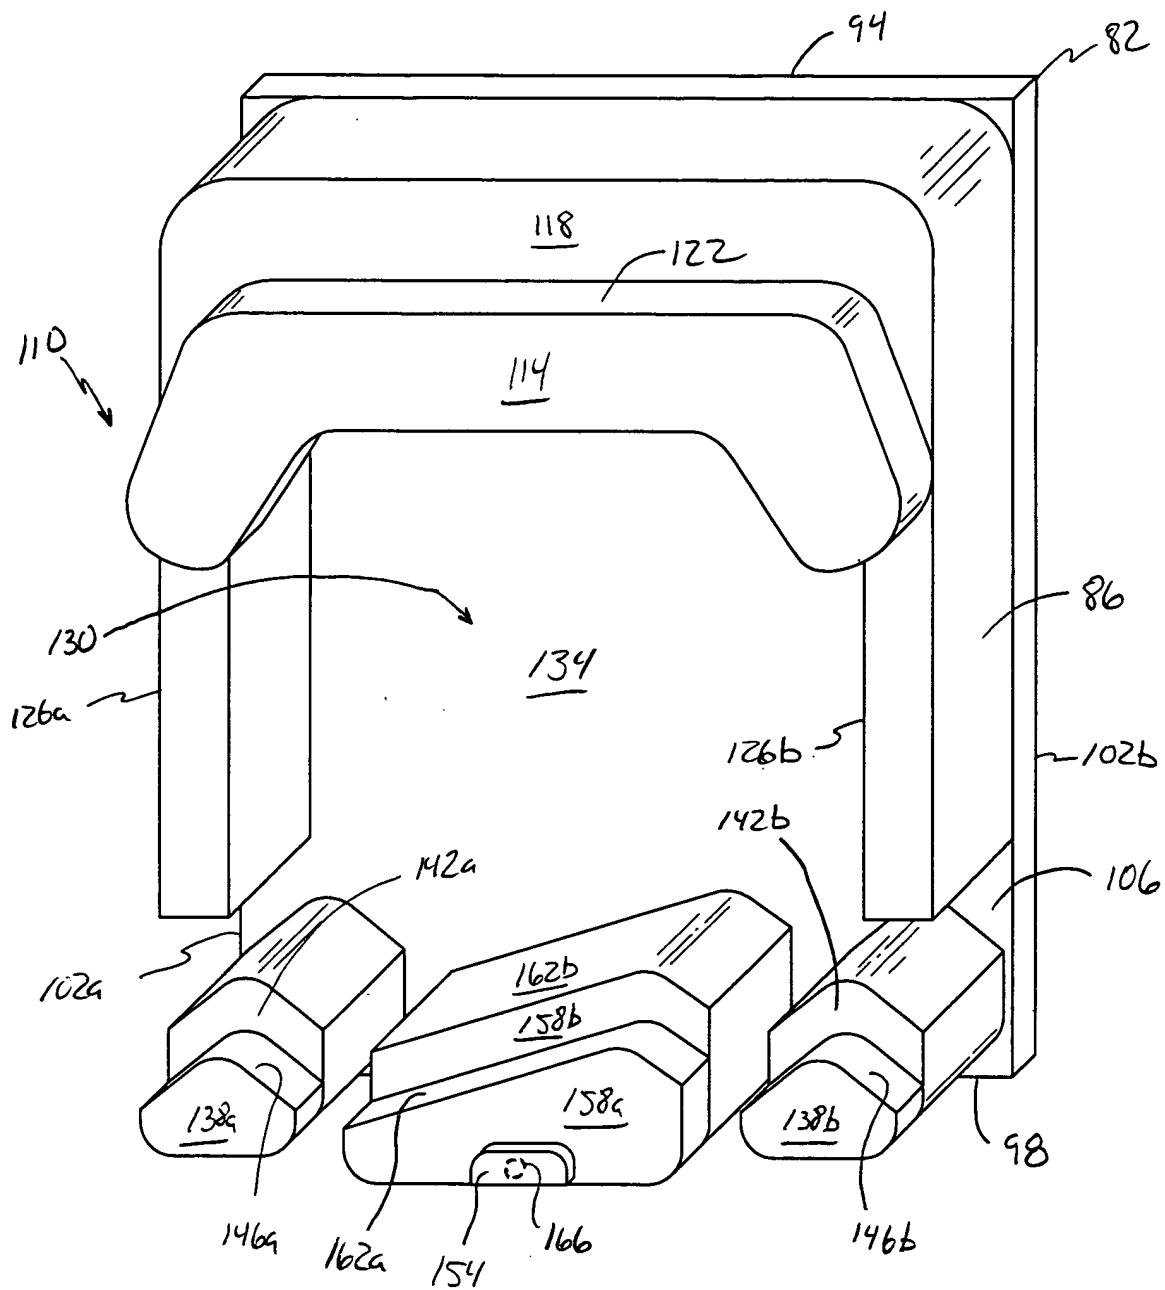


FIG. 3


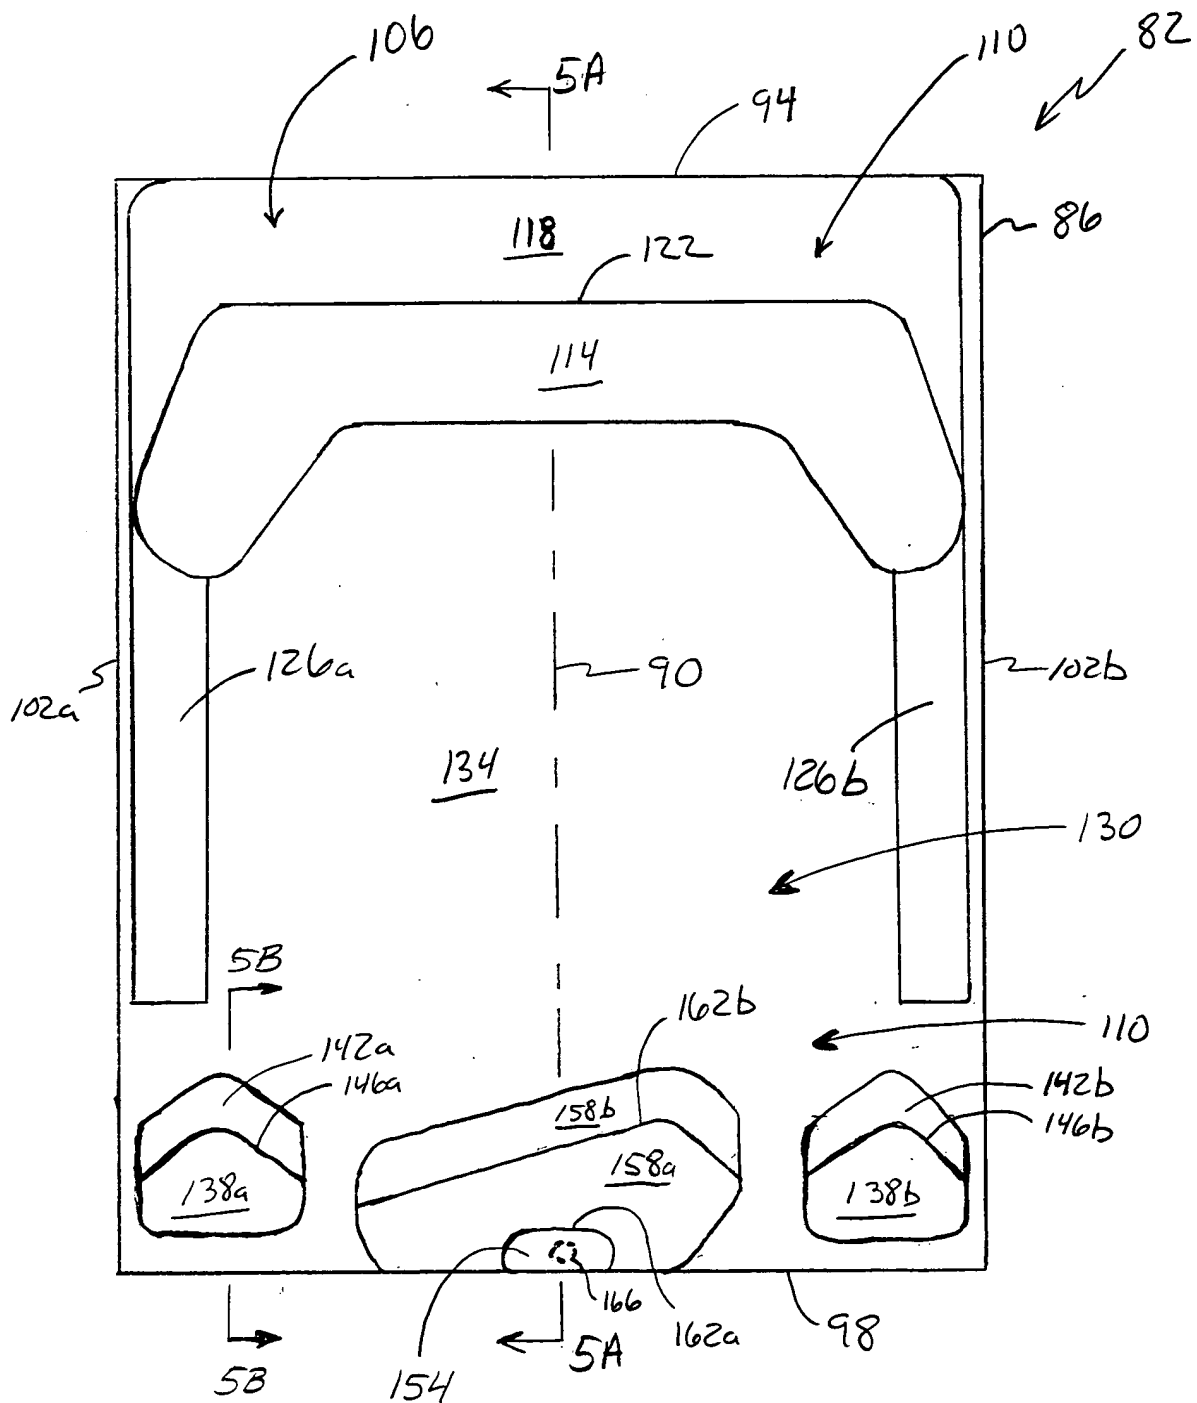


FIG. 4



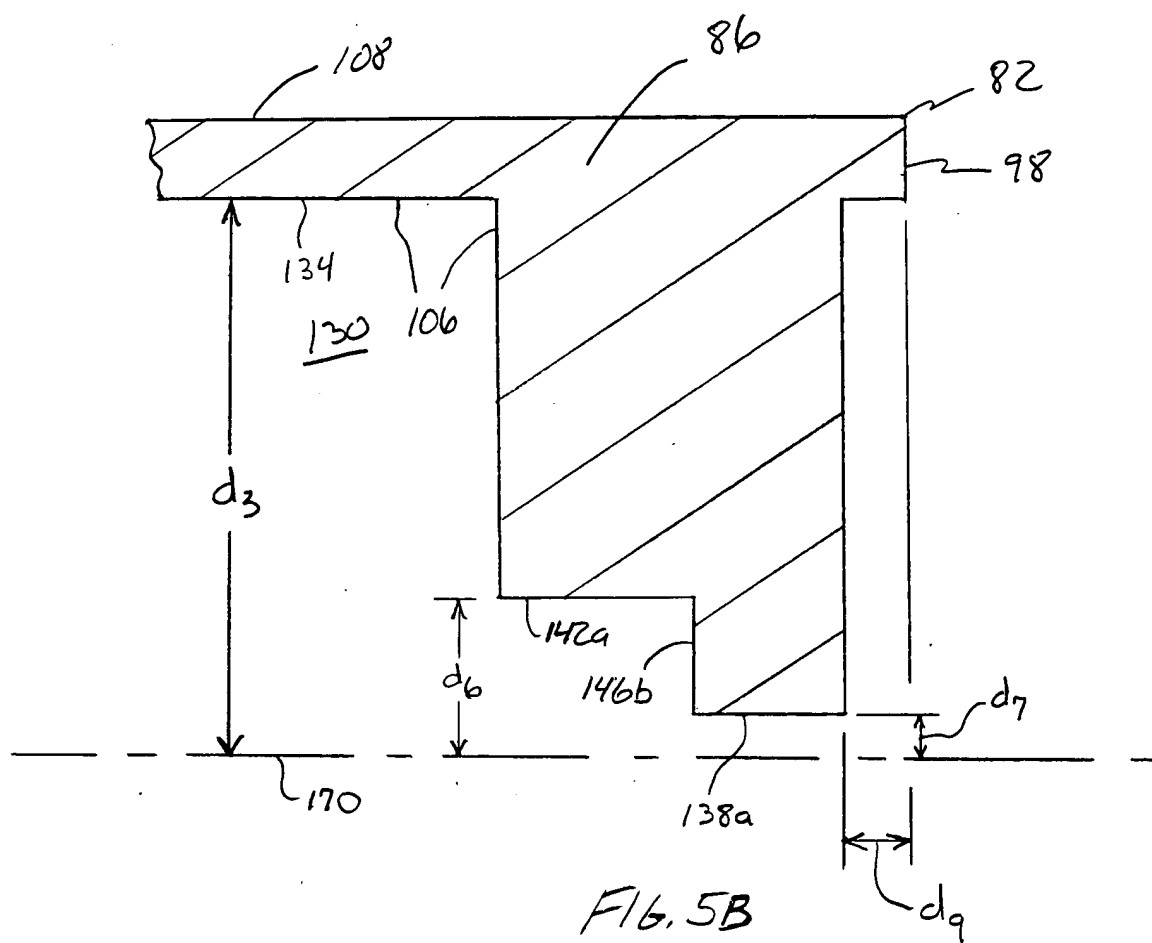

100 200 300 400 500

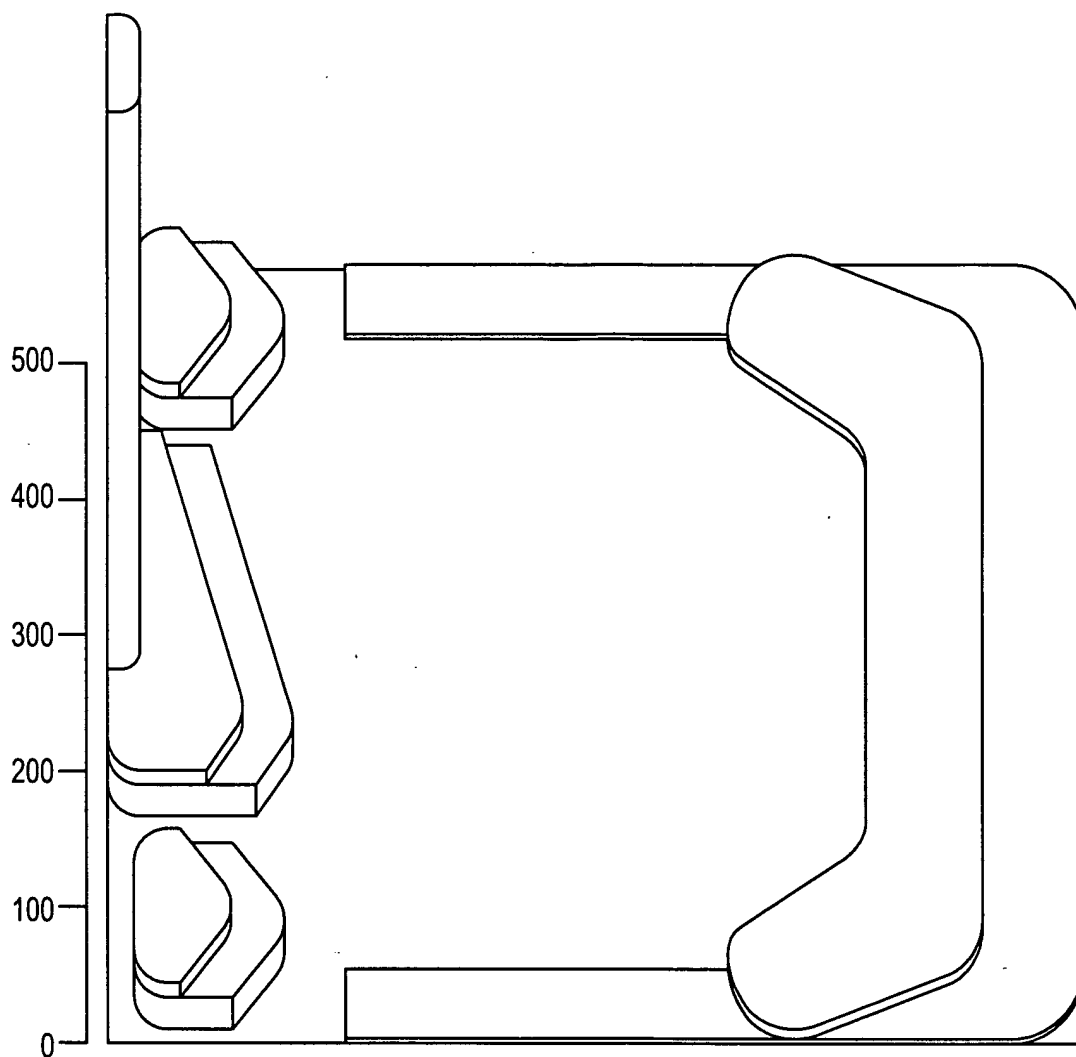


FIG. 6





F/6-00

